


BOP9-RO80

Victaulic port type and Tri-clover port type Stainless Steel RO Membrane Housing

Material: SUS304, SUS316L;
Max working pressure 600 Psi;
Polished or sandblast external surface.



STANDARD SPECIFICATIONS

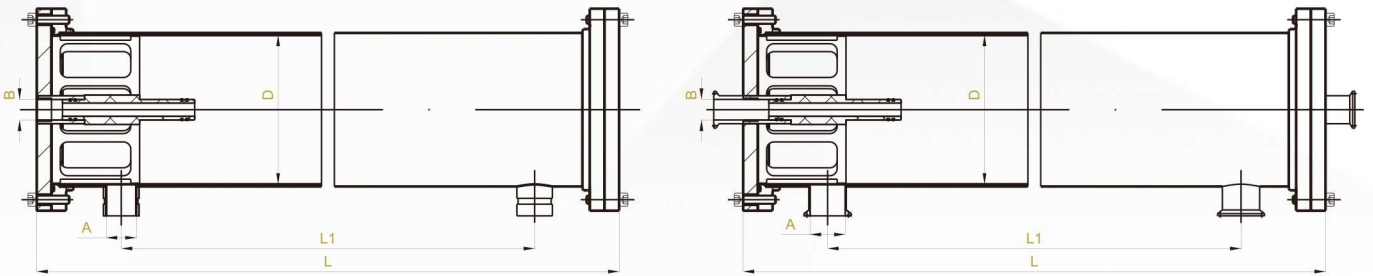

Model	L (mm)	L1 (mm)	D (mm)	A (in)	B (out)
BOP9-8040V-1	1301	1071	φ 203	1 1/2 " -2 "	1 "
BOP9-8040V-2	2317	2087	φ 203	1 1/2 " -2 "	1 "
BOP9-8040V-3	3333	3103	φ 203	1 1/2 " -2 "	1 "
BOP9-8040V-4	4349	4119	φ 203	1 1/2 " -2 "	1 "
BOP9-8040V-5	5365	5135	φ 203	1 1/2 " -2 "	1 "
BOP9-8040V-6	5365	5135	φ 203	1 1/2 " -2 "	1 "
BOP9-8040V-7	7357	7337	φ 203	1 1/2 " -2 "	1 "

Model	L (mm)	L1 (mm)	D (mm)	A (in)	B (out)
BOP9-8040T-1	1301	1071	φ 203	1 1/2 " -2 "	1.5 "
BOP9-8040T-2	2317	2087	φ 203	1 1/2 " -2 "	1.5 "
BOP9-8040T-3	3333	3103	φ 203	1 1/2 " -2 "	1.5 "
BOP9-8040T-4	4349	4119	φ 203	1 1/2 " -2 "	1.5 "
BOP9-8040T-5	5365	5135	φ 203	1 1/2 " -2 "	1.5 "
BOP9-8040T-6	5365	5135	φ 203	1 1/2 " -2 "	1.5 "
BOP9-8040T-7	7357	7337	φ 203	1 1/2 " -2 "	1.5 "